

## Strength of Materials Math Worksheet

1. Calculate the maximum tensile and compressive forces allowed for the cross-sectional area shown in Figure 1. The maximum tensile strength is 500 lb/in<sup>2</sup> (pounds per inches squared). The maximum compressive strength is 5,000 lb/in<sup>2</sup>. Use the following equations to complete the problem. Show your work and calculations.

cross-sectional area = (B) x (L)

maximum tensile force = (maximum tensile strength) x (cross-sectional area)

maximum compressive force = (maximum compressive strength) x (cross-sectional area)

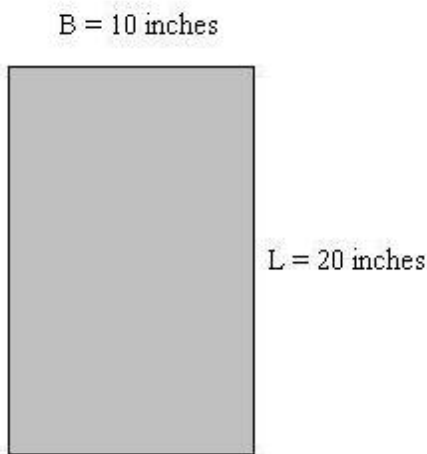


Figure 1: Cross-sectional area.

2. Calculate the maximum tensile and compressive forces allowed for the following two cross-sectional areas shown in Figure 2. The maximum tensile strength is 3,750 lb/in<sup>2</sup>. The maximum compressive strength is 4,850 lb/in<sup>2</sup>. Use the following equations along with those in #2 to complete the problem. Show your work and calculations.

cross-sectional area =  $\pi \times (\text{radius})^2$                        $\pi = 3.14$

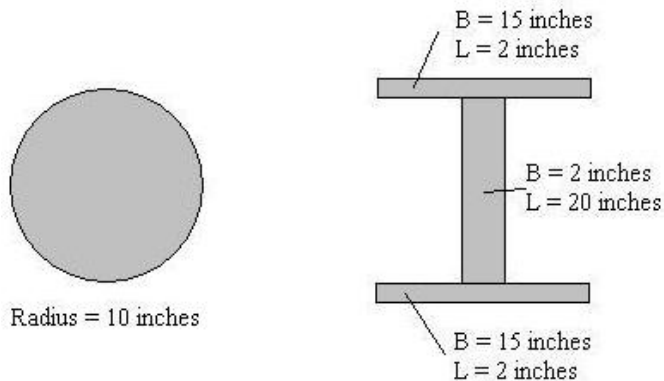


Figure 2: Cross-sectional areas.

3. **Part 1: Calculate the compressive force for the cross-sectional area shown in Figure 3. The original length of the member was 100-in long. After applying the compressive force, the member was 99-in long. The modulus of elasticity for the material used in the cross section is 10,000 lb/in<sup>2</sup>. Use the following equations along with those in #2 and #3 to complete the problem. Show your work and calculations.**

**Part 2: Calculate the tension force for the cross-sectional area shown in Figure 3. The original length of the member was 100-in long. After applying the tensile force, the member was 103-in long. The modulus of elasticity for the material used in the cross section is the same as in #2 above. Use the following equations along with those in #2 and #3 to complete the problem. Show your work and calculations.**

$$\sigma = E * \epsilon$$

$\sigma$  = stress

$\epsilon$  = change in length / original length

$\epsilon$  = strain

E = modulus of elasticity

change in length = (length after force applied) – (original length)

If the change in length is negative, take the absolute value to get a positive number

force =  $\sigma$  \* cross-sectional area

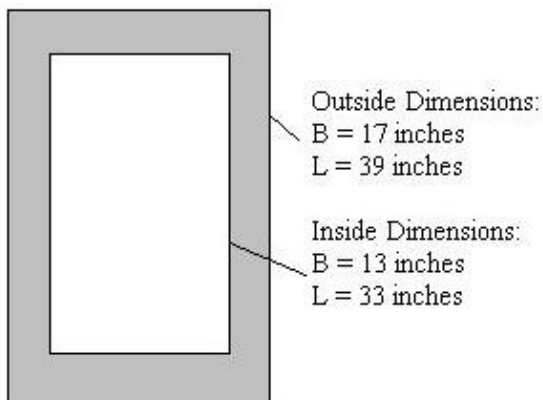


Figure 3: Cross-sectional area.